


2010

IKL501 - FLANGED
LOUVRE



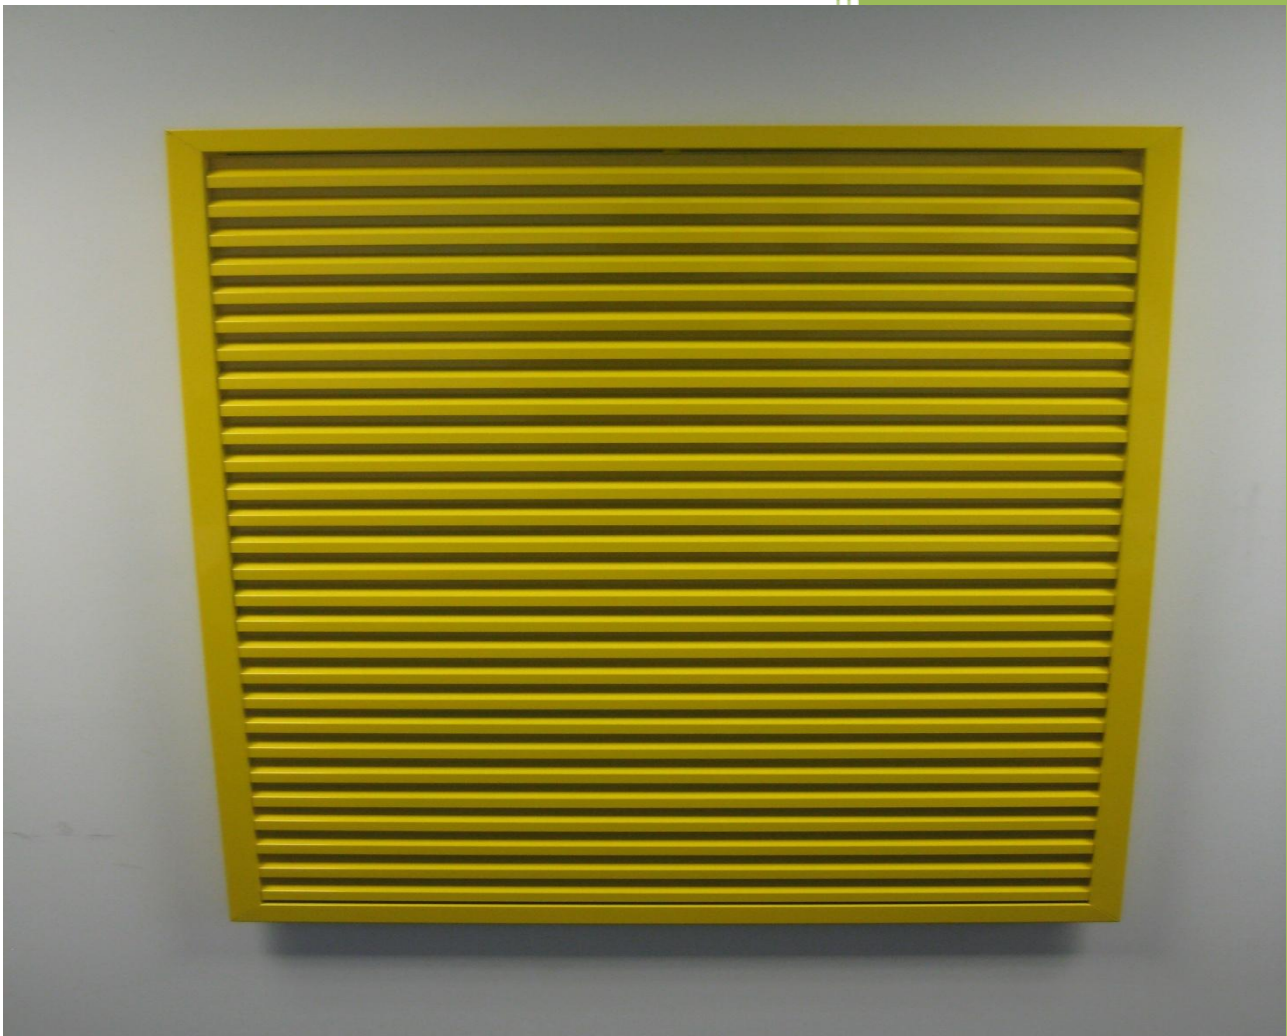

BSRIA

Certificate No. 54729
www.bsria.co.uk/certificates

IKL - 501

PRODUCT DESCRIPTION

- EXTRUDED ALUMINIUM SECTIONS (GRADE 6063-T6)
- PITCH 50MM
- STANDARD FINISHES:
 - STANDARD RAL OR BS COLOURS
 - SILVER ANODISED (SAA-25)
- DEPTH TO FIT 58.65 MM
- OVERALL FLANGE SIZE – THROAT SIZE: 2 x 53.35MM
- STANDARD STAINLESS STEEL FLYSCREEN
 - 2 x 2 MM ON REQUEST: 6 x 6 MM
- PHYSICAL FREE AREA : 50 %
 - MAXIMUM FREE AREA: 75%

SIZES IKL 501

- ALL SIZES ARE POSSIBLE
 - (MIN. HEIGHT 200MM)
- WHEN ORDERING :
 - PLEASE QUOTE OPENING WIDTH X HEIGHT

OPTIONS

- DRAINAGE CHANNEL BLADE
- BIRD / VERMIN MESH
- BLANKING PANELS (INSULATION OPTIONS)

FIXING

- WITH BRACKETS OR SPRING CLIPS

TESTED BY BSRIA

- EN 13030 : 2002

UNIT 1, YARDLEY BROOK
INDUSTRIAL PARK, LEAFORD
WAY, SHARD END,
BIRMINGHAM, B33 9TX

EMAIL:

INFO@IKONALUMINIUM.CO.UK

SALES:

MIKEL@IKONALUMINIUM.CO.UK

WEB:

WWW.IKONALUMINIUM.COM

IKON
ALUMINIUM SYSTEMS

