

2010

IKL332-24/28/32  
GLAZED - IN LOUVRE





# IKL 332 - 24/28/32

## PRODUCT DESCRIPTION

- EXTRUDED SECTIONS ALUMINIUM GRADE (606-3T6)
- PITCH 33.5 MM
- STANDARD FINISHES:
  - STANDARD RAL OR BS COLOURS
  - SILVER ANODISED (SAA-25)
- SUITABLE FOR 20,24,32 MM GLAZING (EQUAL LEG OUTER FRAME)
- TRACK DEPTH : 21.1 MM
- STANDARD STAINLESS STEEL FLYSCREEN : 2 x 2 MM  
ON REQUEST: STAINLESS STEEL FLYSCREEN : 6/6 MM
- PHYSICAL FREE AREA : 33 %
- MAXIMUM FREE AREA : 55 %

## SIZES IKL 331

- ALL SIZES ARE POSSIBLE
- WHEN ORDERING : GLAZING SIZES  
- PLEASE QUOTE WIDTH X HEIGHT

## OPTIONS

- DRAINAGE CHANNEL
- BIRD / VERMIN MESH
- BLANKING PANELS (INSULATION OPTIONS)

## FIXING


- GLAZED - IN
- THE USE OF GLAZING BLOCKS IS RECOMMENDED

UNIT 1, YARDLEY BROOK  
INDUSTRIAL PARK, LEAFORD  
WAY, SHARD END,  
BIRMINGHAM, B33 9TX


EMAIL:  
[INFO@IKONALUMINIUM.CO.UK](mailto:INFO@IKONALUMINIUM.CO.UK)

SALES:  
[MIKEL@IKONALUMINIUM.CO.UK](mailto:MIKEL@IKONALUMINIUM.CO.UK)

WEB:  
[WWW.IKONALUMINIUM.COM](http://WWW.IKONALUMINIUM.COM)

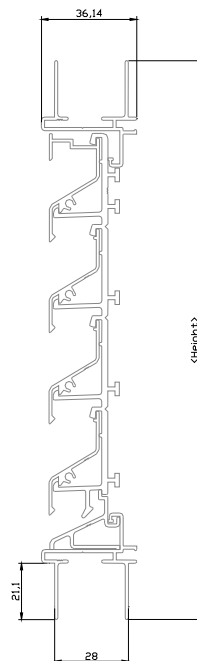

IKL - 332  
Glazed - In 24/28

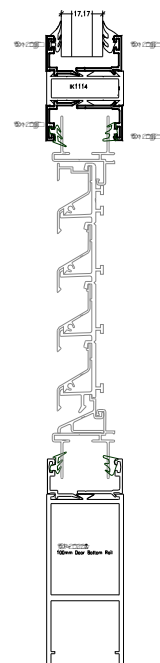

IKL - 332  
Glazed - In

**IKON**  
ALUMINIUM SYSTEMS