


2010

IKL333 - REBATED  
LOUVRE



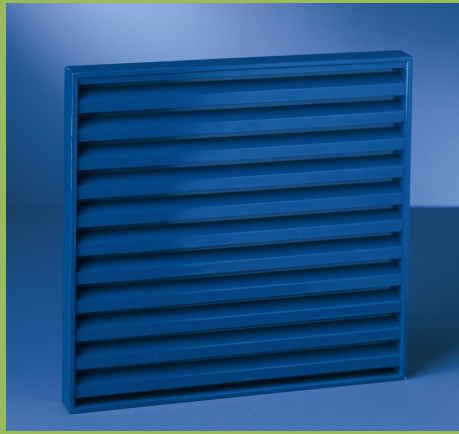

# IKL - 333

## PRODUCT DESCRIPTION

- EXTRUDED ALUMINIUM SECTION (GRADE 6063-T6)
- PITCH 33.5MM
- STANDARD FINISHES:  
-STANDARD RAL OR BS COLOURS  
-SILVER ANODISED (SAA-25)
- DEPTH TO FIT : 36.20 MM
- STANDARD FLYSCREEN: 2 X 2 MM  
ON REQUEST: STAINLESS STEEL  
FLYSCREEN: 6/6 MM
- PHYSICAL FREE AREA : 33 %
- MAXIMUM FREE AREA : 55 %

## SIZES IKL 331

- ALL SIZES ARE POSSIBLE
- WHEN ORDERING :  
- PLEASE QUOTE OPENING WIDTH X HEIGHT

## OPTIONS

- DRAINAGE CHANNEL
- BIRD / VERMIN MESH
- SHAPES & CONTINUOUS
- BLANKING PANELS ( INSULATION OPTIONS )

## FIXING

- WITH BRACKETS OR SPRING CLIPS
- USE OF GLAZING BLOCKS IS RECOMMENDED

## TESTED BY BSRIA

- EN 13030:2002

UNIT 1, YARDLEY BROOK  
INDUSTRIAL PARK, LEAFORD  
WAY, SHARD END,  
BIRMINGHAM, B33 9TX

EMAIL:

[INFO@IKONALUMINIUM.CO.UK](mailto:INFO@IKONALUMINIUM.CO.UK)

SALES:

[MIKEL@IKONALUMINIUM.CO.UK](mailto:MIKEL@IKONALUMINIUM.CO.UK)

UK

WEB:

[WWW.IKONALUMINIUM.COM](http://WWW.IKONALUMINIUM.COM)

**IKON**  
ALUMINIUM SYSTEMS

IKL - 333  
IKON REBATE  
LOUVRE

